

glass sheet polarizer	
colorPol[®] VIS 700 BC4 CW02 004062	
linear VIS-NIR-polarizer	Date: 27.09.2007


Wavelength range with **contrast > 10 000 : 1**
 (Contrast = ratio of parallel and perpendicular transmittance)
 Transmittance (antireflection coating, 0° incident angle)

600 to 850 nm
 > 84 % up to 93 %

Wavelength range with **contrast > 1 000 : 1**
 Transmittance (antireflection coating, 0° incident angle)

600 to 1000 nm
 > 84 % up to 95 %


Spectral response

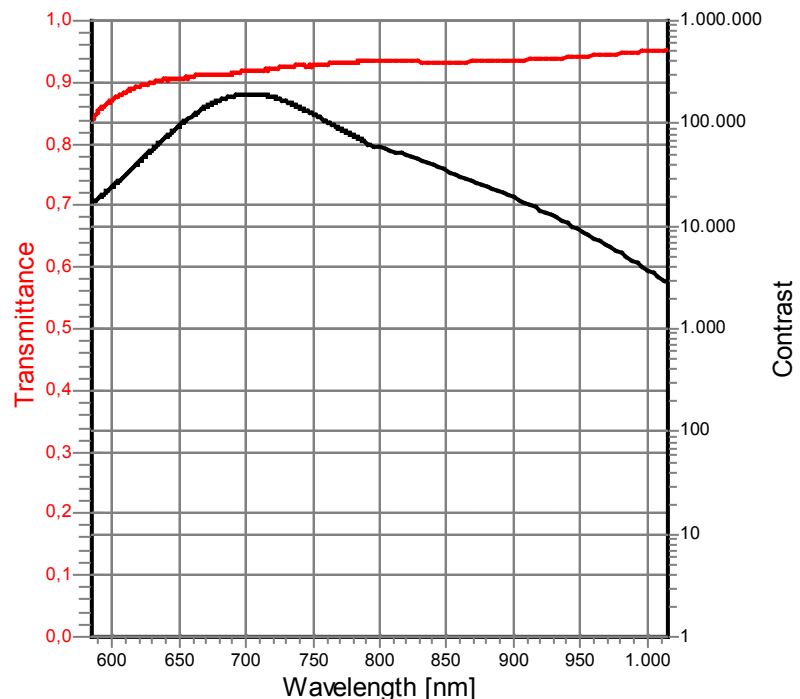

Filter thickness

$2,0 \pm 0,2$ mm

Filter size



➔ Polarization (electric field vector of transmitted light)

Clear aperture

90 % of surface dimension

Polarization axis

< 0,5° to edge

Wavefront distortion

< $\lambda/4$ at 633 nm

Acceptance angle (coating reference for 0°)

$\pm 20^\circ$

Operating temperature

-20 .. +120 °C